

0601 / 0602

Order matrix for pressure transducers

T.1

hex 24 Performance



	Type	Pressure range	Pressure connection	Seal material	Electrical connection
--	-------------	-----------------------	----------------------------	----------------------	------------------------------



0 – 10 V, 3-wire	0601
4 – 20 mA, 2-wire	0602

Max. overpressure ¹⁾	Burst pressure	Pressure range	
4 bar (58 psi)	8 bar (115 psi)	0 – 2 bar (approx. 29 psi)	200
10 bar (145 psi)	20 bar (290 psi)	0 – 4 bar (approx. 58 psi)	400
20 bar (290 psi)	35 bar (500 psi)	0 – 10 bar (approx. 145 psi)	101
40 bar (580 psi)	60 bar (870 psi)	0 – 16 bar (approx. 232 psi)	161
100 bar (1,450 psi)	140 bar (2,000 psi)	0 – 40 bar (approx. 580 psi)	401
150 bar (2,175 psi)	300 bar (4,350 psi)	0 – 100 bar (approx. 1,450 psi)	102

Pressure connection

1/4 BSPP – (DIN 3852), form E, male thread	41
NPT 1/4	09

Seal material – Application areas

NBR (BunaN)	Hydraulic/machine oil, heating oil, air, nitrogen, etc.	1
EPDM	Brake fluid, water, acetylene, hydrogen, etc.	2
FKM (Viton®)	Hydraulic fluids (HFA, HFB, HFD), petrol/gasoline, etc.	3
TPE	Mineral oil, HFC, HFD, water, water-salt solutions, methanol	7

Electrical connection

DIN EN 175301-803-A (DIN 43650-A) ; socket device included	013
M 12x1 - DIN EN 61076-2-101-A	002
Bayonet ISO 15170-A1-4.1 (DIN 72585-A1-4.1)	004
AMP Superseal 1.5®	007
Deutsch DT04-3P	010



Order number:	06XX	XXX	XX	X	XXX
----------------------	-------------	------------	-----------	----------	------------

¹⁾ Static pressure, dynamic pressure 30 to 50% lower. Values refer to the hydraulic or pneumatic part of the pressure transducer.



Technical details

Type:	0601	0602
Output signal:	0 – 10 V (3-wire)	4 – 20 mA (2-wire)
Supply voltage U_B :	11 – 32 VDC	9.6 – 32 VDC
Permissible load apparent ohmic resistance:	$\geq 4.7 \text{ k}\Omega$	$\leq (U_b - 10 \text{ V}) / 20 \text{ mA}$
Idle power consumption:	approx. 5 mA	< 4 mA

Type:	0601 / 0602					
Standard pressure ranges p_{nom} :	0 - 2 bar (0 - 29 psi)	0 - 4 bar (0 - 58 psi)	0 - 10 bar (0 - 145 psi)	0 - 16 bar (0 - 230 psi)	0 - 40 bar (0 - 580 psi)	0 - 100 bar (0 - 1,450 psi)
Overpressure protection $p_u^{1)}$:	4 bar (58 psi)	10 bar (145 psi)	20 bar (290 psi)	40 bar (580 psi)	100 bar (1,450 psi)	150 bar (2,175 psi)
Burst pressure ¹⁾ :	8 bar (115 psi)	20 bar (290 psi)	35 bar (500 psi)	60 bar (870 psi)	140 bar (2,000 psi)	300 bar (4,350 psi)
Mechanical life expectancy:	5,000,000 pulsations at rise rates to 14.5 psi/ms (1 bar/ms) at p_{nom}					
Pressure rise:	$\leq 14.5 \text{ psi/ma}$ ($\leq 1 \text{ bar/ms}$)					
Accuracy:	$\leq \pm 1 \%$ full scale (FS) at room temperature, $\pm 0.5 \%$ BFSL					
Long term stability:	$\pm 0.3 \%$ FS p. a.					
Repeatability ²⁾ :	$\pm 0.1 \%$ FS					
Temperature error ²⁾ :	$\leq \pm 0.04 \%$ of full scale (FS) / °C					
Compensated temperature range:	32 °F ... +158 °F (0 °C ... +70 °C)					
Temperature range ambient:	-22 °F ... +212 °F (-30 °C ... +100 °C)					
Temperature range media:	with NBR (BunaN) seal:	-22 °F ... +212 °F (30 °C ... +100 °C)				
	with EPDM seal:	-22 °F ... +257 °F (-30 °C ... +125 °C)				
	with FKM (Viton®) seal:	-4 °F ... +257 °F (-20 °C ... +125 °C)				
	with TPE seal:	-22 °F ... +230 °F (-30 °C ... +110 °C)				
Wetted parts material	Housing:	Stainless steel AISI 303 (1.4305)				
	Measuring cell:	Ceramic				
	Seal material:	NBR (BunaN), EPDM, FKM (Viton®) or TPE ³⁾				
Insulation resistance:	> 100 M Ω (500 VDC, $R_i > 42 \Omega$)					
Response time 10 – 90 %:	$\leq 2 \text{ ms}$					
Vibration resistance:	20 g; at 4 ... 2000 Hz sine wave; DIN EN 60068-2-6					
Shock resistance:	half sine wave 500 m/s ² ; 11 ms; DIN EN 60068-2-27					
Protection class	IP65: DIN EN 175301-803-A, IP67: M12x1, AMP Superseal 1.5°, cable connector IP67 and IP6K9K: Bayonet ISO 15170-A1-4.1, Deutsch DT04-3P					
Electromagnetic compatibility:	EMC 2014/30/EU, EN 61000-6-2:2005, EN 61000-6-3:2007					
Max. length of connection cable:	30 m					
Protection against reverse polarity, short-circuit and overvoltage:	Built-in					
Cable output thread size:	For DIN EN 175301: PG9 (outside diameter of cable 6 to 9 mm)					
Weight:	approx. 2.82 oz / 80 g (DIN EN 175301 approx. 3.88 oz / 110 g)					

¹⁾ Static pressure, dynamic pressure 30 to 50% lower. Values refer to the hydraulic or pneumatic part of the pressure transducer.

²⁾ Within the compensated temperature range

³⁾ Thermoplastic elastomers



DIN EN 175301-803-A

Pin	0601	0602
1	Uv+	Uv+
2	Gnd	I _{out}
3	U _{out}	nc*

IP65

x ~ 60 mm without coupler socket
x ~ 77 mm with coupler socket

Order number: 013

M 12 – DIN EN 61076-2-101 A

Pin	0601	0602
1	Uv+	Uv+
2	U _{out}	nc*
3	Gnd	I _{out}
4	nc*	nc*

IP67

x ~ 54 mm

Order number: 002

ISO 15170-A1-4.1

Pin	0601	0602
1	Uv+	Uv+
2	Gnd	nc*
3	U _{out}	I _{out}
4	nc*	nc*

IP67, IP6K9K

x ~ 56 mm

Order number: 004

AMP Superseal 1.5°

Pin	0601	0602
1	U _{out}	nc*
2	Gnd	I _{out}
3	Uv+	Uv+

IP67

x ~ 61 mm

Order number: 007

Deutsch DT04-3P

Pin	0601	0602
A	Uv+	Uv+
B	Gnd	nc*
C	U _{out}	I _{out}

IP67, IP6K9K

x ~ 61 mm

Order number: 010

Sealing ring

1/4 BSPP DIN EN ISO 1179-2 (DIN 3852-11) form E

Thread code: 41

NPT 1/4

Thread code: 09

Accessories


Mating plugs

T.5

Accessories



<p>Deutsch DT06-3S (for DT04-3P) 3 x 0.5 mm² PUR cable 6.5 ft (2 m), IP67</p>	<p>Suitable for connector code 010 Deutsch DT04-3P</p>	<p>Order number: 1-1-36-653-160</p>
---	--	--

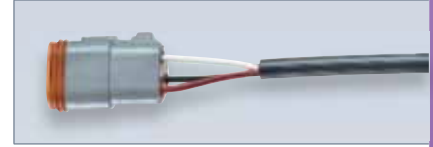

<p>TE AMP Superseal 1.5°, 3-pin 3 x 0.5 mm² Radox cable 6.5 ft (2 m), IP65</p>	<p>Suitable for connector code 007 AMP Superseal 1.5°</p>	<p>Order number: 1-1-32-653-158</p>
--	---	--



<p>M12 DIN EN 61076-2-LF, 4-pin 4 x 0.34 mm² PUR cable 6.5 ft (2 m), IP65</p>	<p>Suitable for connector code 002 M12 DIN EN 61076-2-101 A</p>	<p>Order number: 1-1-00-653-162</p>
---	---	--



<p>M 12x1 DIN EN 61071-2-101 D straight, 4-pin Terminals for wire diameter 0.75 mm² (AWG 18)</p>	<p>Suitable for connector code 002 M12 DIN EN 61076-2-101 A</p>	<p>Order number: 1-6-00-652-016</p>
--	---	--



<p>Coupler socket M 12x1 DIN EN 61071-2-101 D Angled, 4-pin Terminals for wire diameter 0.75 mm² (AWG 18)</p>	<p>Suitable for connector code 002 M12 DIN EN 61076-2-101 A</p>	<p>Order number: 1-6-00-652-017</p>
--	---	--



Pressure Transducers, Performance series 0601, 0602

hex 24



- Housing/wetted parts made of stainless steel AISI 303 (1.4305), others on request
- Ceramic sensor in thick film technology
- Very competitively priced electronic pressure transducers
- High overpressure protection (up to 2 x)
- Small, compact electronic transducers
- Broad diversity of electronic and mechanical connection options
- High level of adaptability to your requirements (custom solutions)